



ABRASION/MECHANICAL

ROUNDIT® 2000 NX Orange


Product Highlights

- Operating temperature from -60°C to 200°C (-76°F to 392°F)
- ASD EN 6049-006
- Excellent cut-through and abrasion resistance
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Lightweight construction
- Tracer indicating the maximum operating diameter
- Aesthetic solution
- Oil and water repellent



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

RI2000NXO_05122009

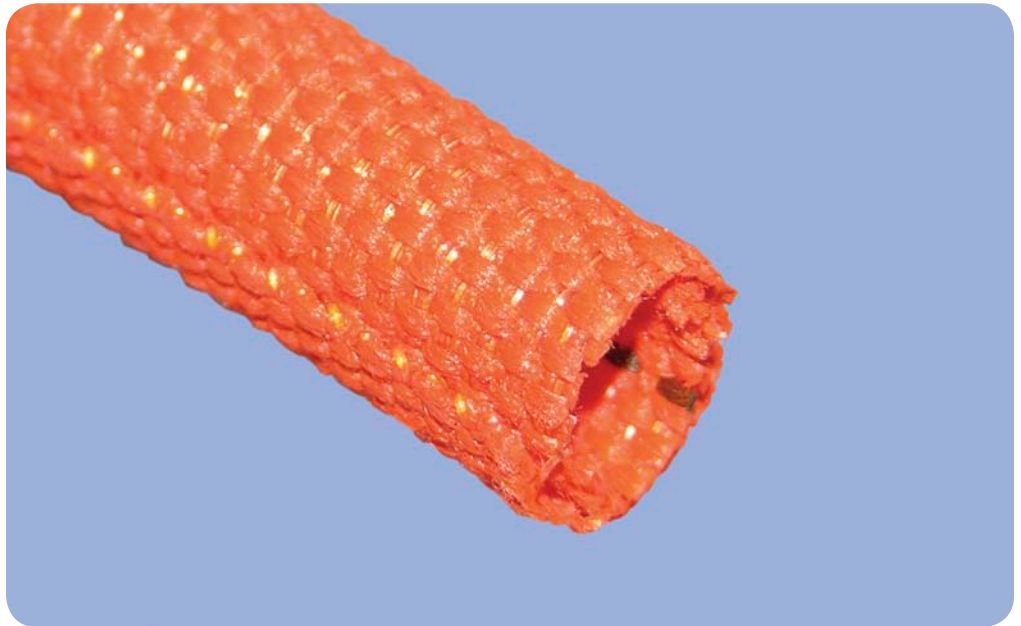

ROUNDIT® 2000 NX is a self-wrapping sleeve manufactured from PPS monofilaments and Nomex* with an oil and water repellent treatment, designed for mechanical protection and maintenance of wire and cable bundles. Its construction with 100% covering ratio provides excellent cut-through and abrasion resistance.

ROUNDIT 2000 NX in orange is designed to identify wire harnesses connected with test equipment taken on-board airplanes.

The self-wrapping feature allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000 NX Orange also accommodates breakouts.

ROUNDIT 2000 NX has many applications in the aeronautical and military industries.

*Nomex is a registered trademark of DuPont.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products