


## Product Highlights

- Rated to 200°C Class H
- Grade C (2,500 V)
- Meets VW-1
- UL Recognized Component
- NEMA 5
- Applicable Documents
  - ASTM D-350
  - ASTM D-372
  - UL 1441
  - NEMA TF-1
- Excellent low temperature flexibility
- Available in AWG sizes #24 through 1" I.D.
- Available in red iron oxide, white, black and natural

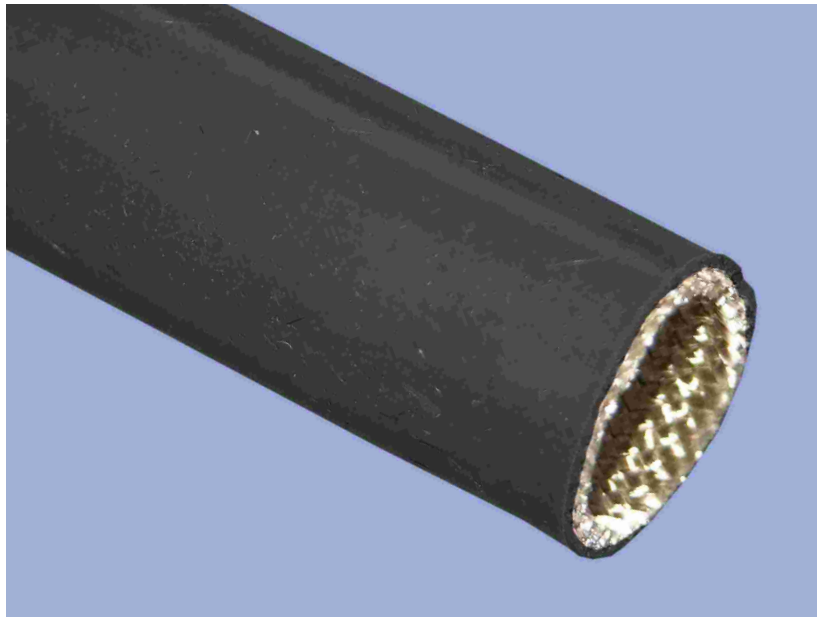

# Ben-Har™ 1151-FR Grade C

## Silicone Rubber Coated Fiberglass Sleeving

Bentley-Harris® Ben-Har 1151-FR sleeving is an extremely flexible silicone rubber coated fiberglass sleeving with outstanding flame retardant properties. It is a UL Recognized Component meeting VW-1 flammability requirements and is recommended for Class H (200°C) systems. The special combination of a smooth fiberglass bore and flexible, elastomeric silicone coating allows this sleeving to expand and conform over larger dimensions, assuring a snug fit, permanent placement, and elastic self fitting on components or terminals. The excellent bond of rubber coating to the braid insures against damage from rough assembly handling.

Ben-Har 1151-FR is resistant to acids, alkalis, organic solvents, and aliphatic hydrocarbons. Slight swelling is produced by aromatic solvents and chlorinated hydrocarbons. Ketones and esters may cause deterioration. Ben-Har 1151-FR is compatible with common Class H insulating varnishes.

Ben-Har 1151-FR is commonly used in appliance assemblies, wire harnesses, transformer leads, power supplies, and motor coil and heater leads. This product can be obtained in colors for identification and appearance.

**BentleyHarris®**  
Protection Products

# Performance Data – Ben-Har™ 1151-FR Grade C

Property	Result
Hardness, durometer A	35 +/- 5
Tensile strength	875 psi
Elongation	500%
Tear resistance, die B	70 p pi
Tensile modulus at 100% elongation	150 psi
Dielectric constant (100 Hz - 100 kHz)	3.10
Dissipation factor (100 Hz)	0.00320
Dissipation factor (10,000 Hz)	0.00016
Volume resistivity	2.48 x 10 <sup>14</sup> ohm-cm
Dielectric strength	485 volts / mil

## Product Specifications

NEMA Size	Nominal Diameter (inches)	Nominal Diameter (mm)	Bentley-Harris Part Number	Maximum Diameter (inches)	Minimum Diameter (inches)
24	0.022	0.56	32003924XX	0.027	0.020
22	0.027	0.69	32003922XX	0.032	0.025
20	0.034	0.86	32003920XX	0.039	0.032
18	0.042	1.07	32003918XX	0.049	0.040
16	0.053	1.35	32003916XX	0.061	0.051
14	0.066	1.68	32003914XX	0.072	0.064
12	0.085	2.16	32003912XX	0.089	0.081
10	0.106	2.69	32003910XX	0.112	0.102
9	0.118	3.00	32003909XX	0.124	0.114
8	0.133	3.38	32003908XX	0.141	0.129
7	0.148	3.76	32003907XX	0.158	0.144
6	0.166	4.22	32003906XX	0.178	0.162
5	0.186	4.72	32003905XX	0.198	0.182
4	0.208	5.28	32003904XX	0.224	0.204
3	0.234	5.94	32003903XX	0.249	0.229
2	0.263	6.68	32003902XX	0.278	0.258
1	0.294	7.47	32003901XX	0.311	0.289
0	0.330	8.38	32003900XX	0.347	0.325
3/8"	0.375	9.52	32003010XX	0.399	0.375
7/16"	0.438	11.12	32003011XX	0.462	0.438
1/2"	0.500	12.70	32003013XX	0.524	0.500
5/8"	0.625	15.87	32003016XX	0.655	.0625
3/4"	0.750	19.05	32003019XX	0.786	0.750
7/8"	0.875	22.22	32003022XX	0.911	0.875
1"	1.000	25.40	32003025XX	1.036	1.000

XX = Color Code

01 = Natural    02 = White  
14 = Red iron oxide

03 = Black

°C	°F
538	1000
527	980
516	960
504	940
493	920
482	900
471	880
460	860
449	840
438	820
427	800
416	780
404	760
393	740
382	720
371	700
360	680
349	660
338	640
327	620
316	600
304	580
293	560
282	540
271	520
260	500
249	480
238	460
227	440
216	420
204	400
193	380
182	360
171	340
160	320
149	300
138	280
127	260
116	240
104	220
99	210
88	190
77	170
66	150
54	130
43	110
38	100
35	95
30	86
25	77
20	68
15	59
10	50
5	41
0	32
-5	23
-10	14
-15	5
-18	0
-20	-4
-40	-40
-60	-76
-70	-94



Systems Protection Group

241 Welsh Pool Road  
Exton, PA 19341  
Toll-free: 800-926-2472  
Tel: (610) 363-2600  
Fax: (610) 524-9086

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard terms of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluation to determine the suitability of the product for specific applications.