



ABRASION/MECHANICAL

ROUNDIT® PPS


Product Highlights

- Operating temperature from -60°C to +175°C (-76°F to 347°F)
- ABS 1552
- C20979
- F.A.R. Part 25
- Excellent cut-through and abrasion resistance
- Self-wrapping design
- Halogen-free
- Ideal for reworking components and breakouts
- Lightweight construction
- Aesthetic solution
- Does not trap heat or humidity



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

RI2000PPS_03302009

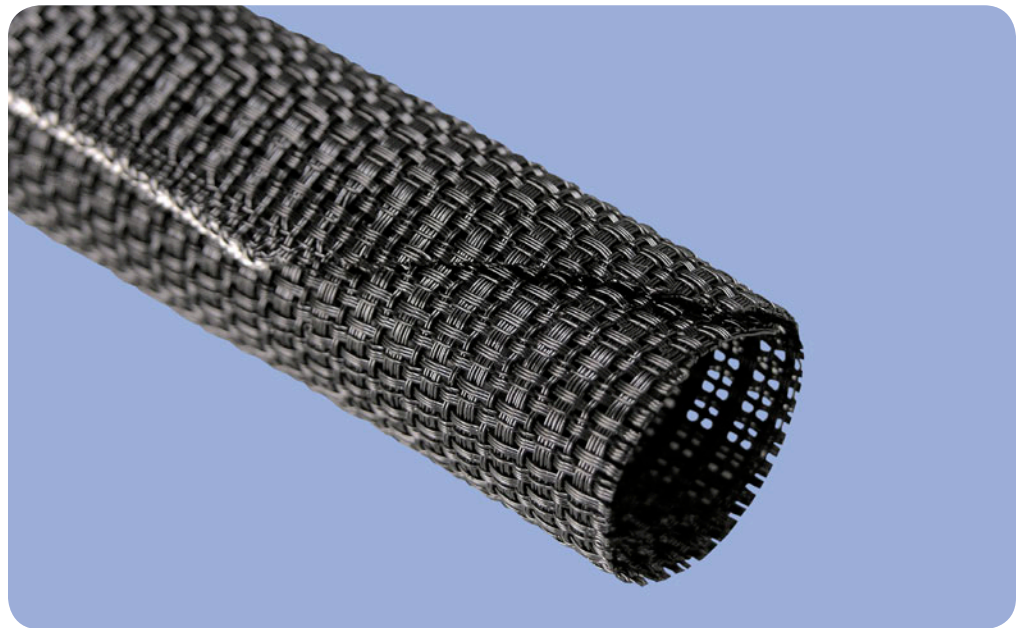

ROUNDIT® PPS is a self-wrapping sleeve manufactured from polyphenylene sulfide (PPS) monofilaments. This product offers excellent off-gassing properties and does not absorb or trap moisture making it ideal for use in space applications. The design allows for quick and easy installation and removal for the assembly, maintenance and inspection of wire harnesses and cable assemblies.

ROUNDIT PPS is available in sizes from 1/4" to 1-1/2" (5 mm to 38 mm) to cover a wide range of cable and wire diameters.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products