



EMI

# Roundit™ V0 EMI


## Project Datasheet

### Product Highlights

- Working Temperature -50°C to +150°C
- Self-wrapping design
- Zero Halogen
- UL 94 V0 Raw material
- Cu/Sn metal (EN 13602)
- EMI protection

### Typical Applications

- Easy installation for local EMI protection
- Ideal for protecting in between connectors without disconnecting them

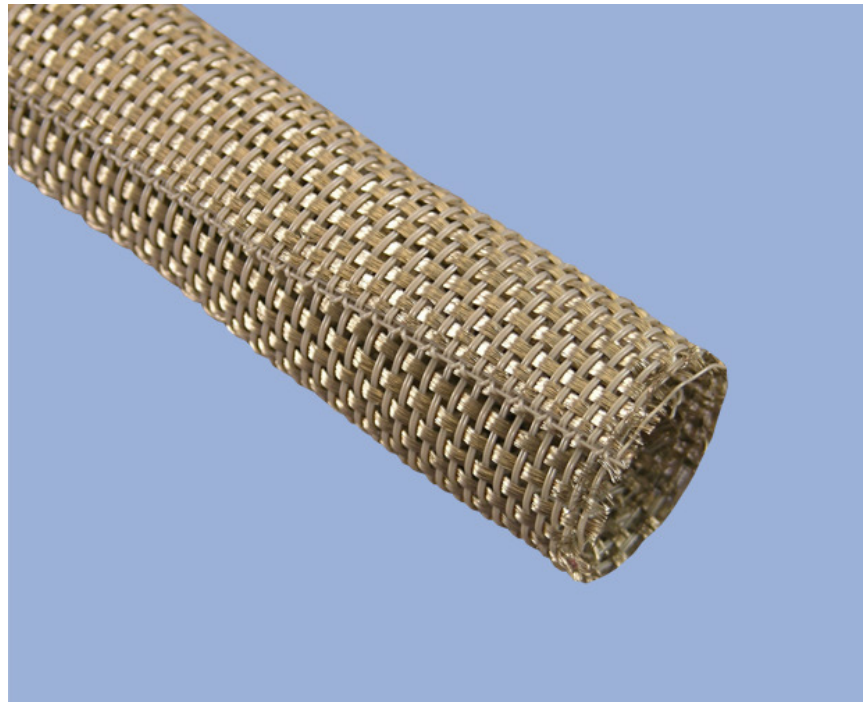

**Roundit V0 EMI** is a wrap-around sleeving designed for EMI shielding of wires and cable bundles. Roundit V0 EMI is manufactured from UL 94 V0 rated polyester monofilaments and tin plated copper wires according to EN 13602, Quality A

The self-wrapping feature of Roundit V0 EMI allows for quick and easy installation and removal of the product for assembly and maintenance. Roundit V0 EMI may be installed or removed without any manipulation of connectors or fittings and is an ideal solution where breakouts are necessary.

To ease installation, a special assembly tooling, "Roundit-Tool" has been designed.

Roundit V0 EMI has many applications in the railway, marine and electronic industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT products on cable and wire configurations.



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

E\_RV0EMI 021009

**BentleyHarris**  
Protection Products