


## Product Highlights

- Working Temperatures  
-70°C to +200°C
- FAR Part 25 Compliant
- Halogen-free
- Highly flexible
- Easy to apply & remove
- Ideal for inspection or maintenance without disconnecting components
- Lightweight Construction
- Easy to cut with scissors
- End fray resistant

## Typical Applications

- Wire Harnesses
- Cable Assemblies

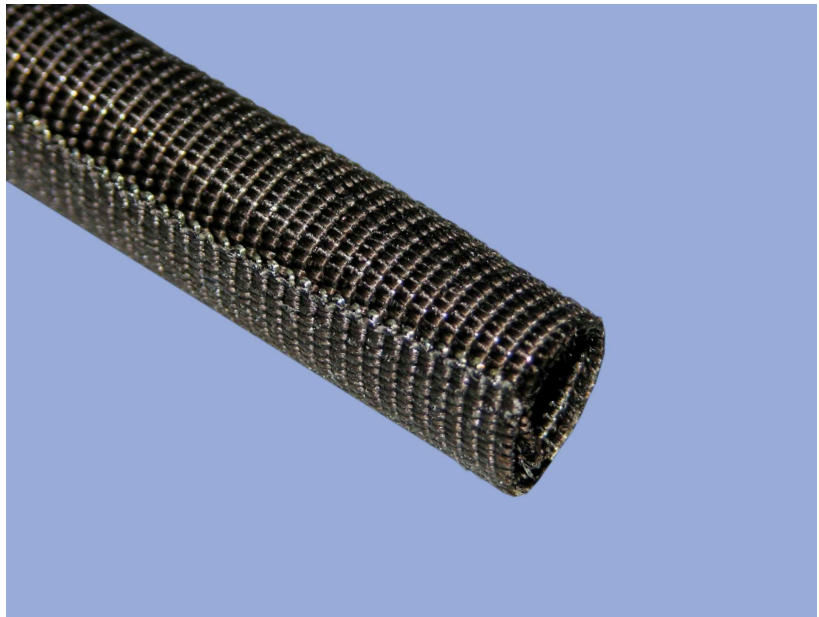

## ROUNDIT<sup>®</sup> 2000 TF

ROUNDIT<sup>®</sup> 2000TF is manufactured from polyphenylene sulfide (PPS) monofilaments and PTFE multifilaments with an oil and water repellent treatment. This highly flexible, self-wrapping solution offers abrasion resistance and bundling capabilities for wire and cable configurations. The innovative design with a 100% covering ratio is easy to apply, ideal for reworking components and accommodates breakouts.

ROUNDIT 2000TF enables users to stock a range of sizes with diameters available from 3 mm up to 25 mm. ROUNDIT 2000TF is available in standard spool quantities or custom lengths.

As an added benefit, the patented ROUNDIT<sup>®</sup> Tool will help improve installation time and is designed to install ROUNDIT<sup>®</sup> products on harnesses from 5mm up to 19mm in diameter.