




THERMAL MANAGEMENT

FyreJacket® Aerospace Grade

Product Highlights

- AS1072 Type 2 (Aero Grade)
- Operating temperature: -54°C to +260°C (-65°F to +500°F)
- Short term exposure up to 1093°C (+2000°F) when installed on proper hose assembly
- Fluid resistant to hydraulic fluids and lubricating oil
- Standard color is red iron oxide

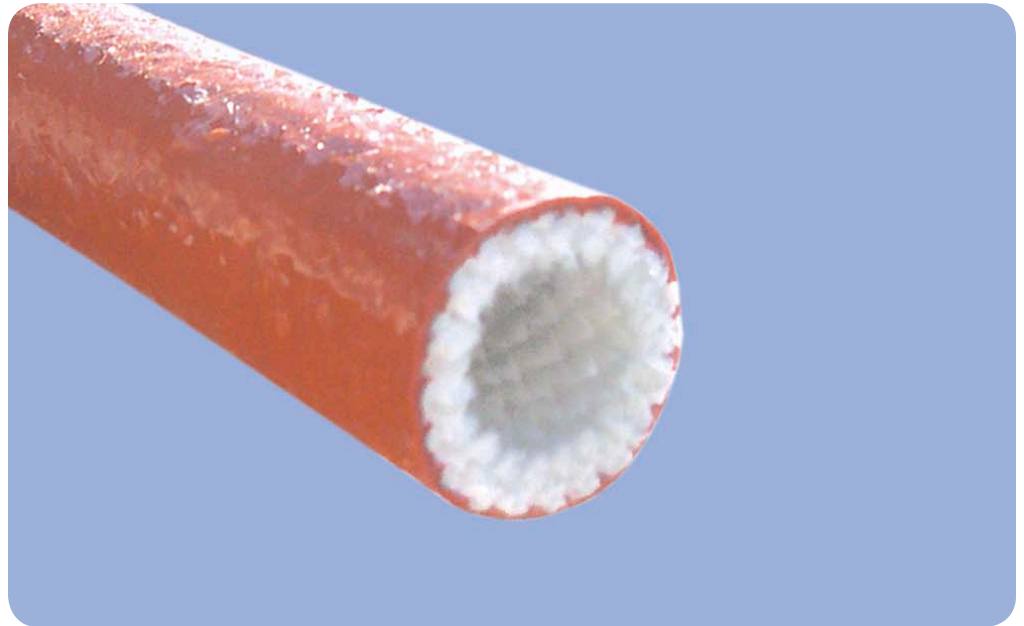

FyreJacket® Aerospace Grade is a thickwall braided fiberglass sleeving coated with specially compounded silicone rubber. FyreJacket is intended to slide on easily over a variety of cables and hoses and expand readily to go over fittings and couplings. The specially formulated silicone rubber coating has excellent shedding properties.

FyreJacket is used to protect hoses and hose assemblies, tubing, piping, wires, wire assemblies, and cables from exposure up to 500°F (+260°C) and from molten splash and welding sparks. Aerospace grade FyreJacket will withstand short term flame exposure to 2000°F (+1093°C) when installed on a hose assembly qualified to SAE Aerospace Standard 1055. Aerospace FyreJacket is packaged in random lengths, with minimum lengths no shorter than 15 feet.



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

FJASG_10202009

BentleyHarris®
Protection Products