



ABRASION/MECHANICAL

ROUNDIT® 2000 NX


Product Highlights

- Operating temperature from -60°C to +200°C (-76°F to 392°F)
- ASD EN 6049-006
- BMS 13-81 Type 1
- DMS2379 Class 4, Type 4
- FAR Part 25
- Halogen-free
- Self-wrapping design
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Tough fabric texture



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

RI2000NX_03252009

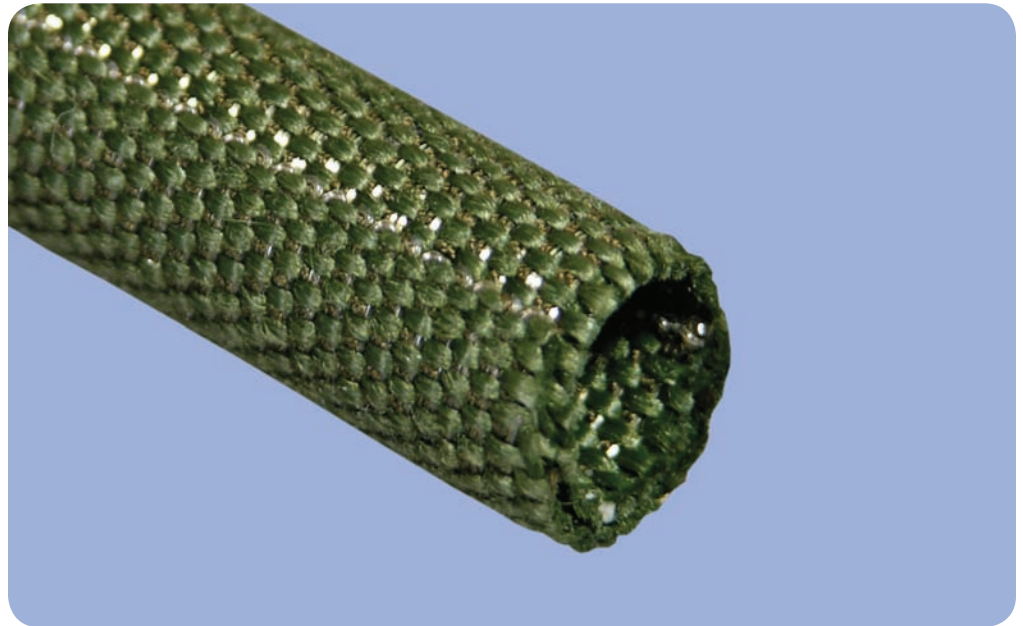

ROUNDIT® 2000 NX is a woven combination of Nomex® and PPS (polyphenylene sulfide). The Nomex/PPS blend in a flat weave construction gives ROUNDIT 2000 NX a rugged yet smooth texture and appearance for high temperature bundling and abrasion resistance. This product is rated to 200°C (392°F) and is non-halogenated.

ROUNDIT 2000 NX is ideal for commercial and defense aircraft applications due to its excellent abrasion resistance and halogen-free qualities.

ROUNDIT® products are tough, lightweight oversleeves used to bundle and protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The self-wrapping feature of ROUNDIT products allows for quick and easy application and removal of the product for assembly and maintenance. The product may also be applied or removed without disturbing connectors or fittings.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

BentleyHarris®
Protection Products